

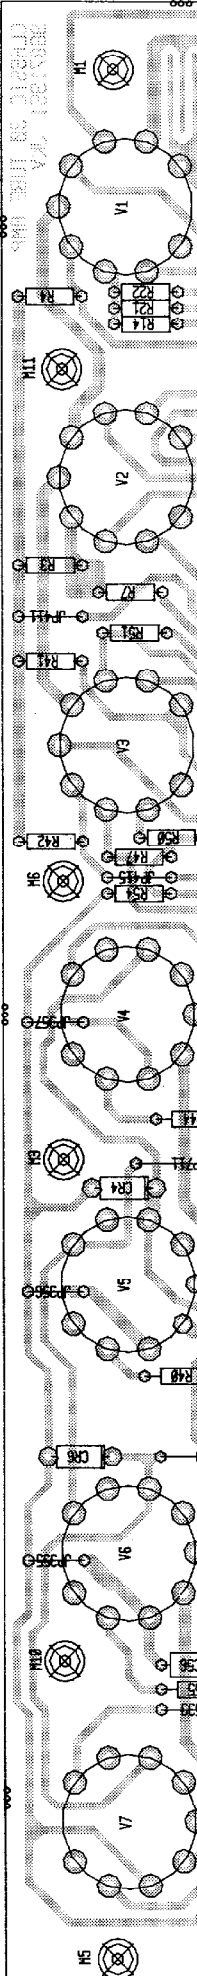
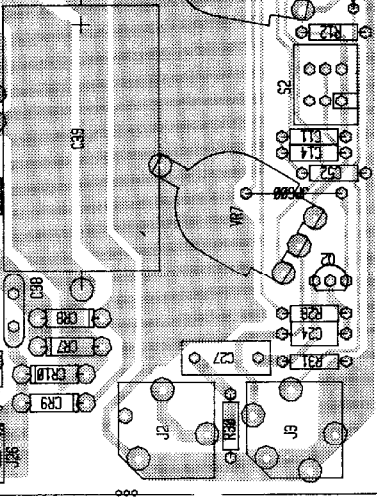


BARCODE



3001
44-310-04
UNIVERSAL
SERIES



CLASSIC 30

NAME	VALUE	NUMBER	DESCRIPTION	R12	220K	70240036	220K—1/4W—5%—CF—T&R
C1	470PF	70340058	470PF 10% 50V TUB CER T&R	R13	10K	70240025	10K—1/4W—5%—CF—T&R
C10	39PF	70340052	39PF 50V TUB CER T&R	R14	150K	70240035	150K—1/4W—5%—CF—T&R
C11	.047	70340017	.047 MFD 10% 50V MON T&R	R15	1.5K	70240018	1500—1/4W—5%—CF—T&R
C12	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R16	1.5K	70240018	1500—1/4W—5%—CF—T&R
C13	47A50L	70340063	.47@50V LOW LEAKAGE	R17	1K	70240017	1K—1/4W—5%—CF—T&R
C14	270PF	70340057	270PF 10% 50V TUB CER T&R	R18	1.5K	70240018	1500—1/4W—5%—CF—T&R
C15	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R19	68K	70240032	68K—1/4W—5%—CF—T&R
C16	.015	70340010	.015 MFD 10% 50V T/C T&R	R2	150K	70240035	150K—1/4W—5%—CF—T&R
C17	22A25	70320012	22 MFD 25VDC LYT. CAP. I & H	R20	220K	70240036	220K—1/4W—5%—CF—T&R
C18	.022	70340012	.022 MFD 10% 50V MON.T&R	R21	2.2M	70240040	2.2M—1/4W—5%—CF—T&R
C19	.022	70340012	.022 MFD 10% 50V MON.T&R	R22	220K	70240036	220K—1/4W—5%—CF—T&R
C20	.001R630	70320160	.001MF—5%—630V—MT R/W	R23	1M	70240039	1M—1/4W—5%—CF—T&R
C20	.1	70340100	.1 MFD +80-20LV AX.LP.T&R	R24	100K	70240034	100K—1/4W—5%—CF—T&R
C21	.001	70340000	.001 MFD 10% 50V MON T&R	R25	1K	70240017	1K—1/4W—5%—CF—T&R
C22	.1P10	70340101	.1 MFD 50 VDC 10% MON.T&R	R26	22K	70240029	22K—1/4W—5%—CF—T&R
C23	2.2A35	70320200	2.2MFD 35VDC LY. CAP T&R	R27	10K	70240025	10K—1/4W—5%—CF—T&R
C24	.1P10	70340101	.1 MFD 50 VDC 10% MON.T&R	R28	1M	70240039	1M—1/4W—5%—CF—T&R
C25	100PF	70340054	100PF 10% 50V TUB CER T&R	R29	47K	70240031	47K—1/4W—5%—CF—T&R
C26	.0022	70340004	.0022 MFD 10% 50V T/C T&R	R3	100K	70240034	100K—1/4W—5%—CF—T&R
C27	.22R100M	70330007	.22MFD 100VDC 5% MYLAR	R30	22K	70240029	22K—1/4W—5%—CF—T&R
C28	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R31	22K	70240029	22K—1/4W—5%—CF—T&R
C29	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R32	2.2M	70240040	2.2M—1/4W—5%—CF—T&R
C3	.047A400	70320105	.047 MFD 400 V T&R CAP	R33	1.5KW1	70210007	1500—1W—5%—MO—T&R
C30	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R34	22	70240007	22—1/4W—5%—CF—T&R
C31	.1R250MY	70320096	.1 MFD 250 VDC MYLAR CA/B/R	R35	100	70240010	100—1/4W—5%—CF—T&R
C32	.022R400	70320106	.022 MFD 400 V CAP	R36	2.2K	70240020	2200—1/4W—5%—CF—T&R
C33	.1R250MY	70320096	.1 MFD 250 VDC MYLAR CA/B/R	R37	2.7K	70240021	2700—1/4W—5%—CF—T&R
C34	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R38	1M	70240039	1M—1/4W—5%—CF—T&R
C35	.022R400	70320106	.022 MFD 400 V CAP	R39	68K	70240032	68K—1/4W—5%—CF—T&R
C36	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R4	150K	70240035	150K—1/4W—5%—CF—T&R
C37	.0047	70340007	.0047 MFD 10% 50V MON T&R	R40	47K	70240031	47K—1/4W—5%—CF—T&R
C38	.01CER	70320099	.01MFD 1000VDC CD-UNCUT	R41	100K	70240034	100K—1/4W—5%—CF—T&R
C39	47A500	70320005	47MF—10%—500VDC-EL-AX	R42	68K	70240032	68K—1/4W—5%—CF—T&R
C4	470PF	70340058	470PF 10% 50V TUB CER T&R	R43	100W5	70250006	100—5W—10%—WW—AXL
C40	47A500	70320005	47MF—10%—500VDC-EL-AX	R44	47K	70240031	47K—1/4W—5%—CF—T&R
C41	22A450	70320020	22 MFD 450 VDC LYTIC CAP	R45	220K	70240036	220K—1/4W—5%—CF—T&R
C42	22A450	70320020	22 MFD 450 VDC LYTIC CAP	R46	1.5KW1	70210007	1500—1W—5%—MO—T&R
C43	22A450	70320020	22 MFD 450 VDC LYTIC CAP	R47	1M	70240039	1M—1/4W—5%—CF—T&R
C44	22A25	70320012	22 MFD 25VDC LYT. CAP. T&R	R48	1M	70240039	1M—1/4W—5%—CF—T&R
C45	2200A50	70320036	2200 MFD 50 VDC LYTIC CAP	R49	220K	70240036	220K—1/4W—5%—CF—T&R
C46	2200A50	70320036	2200 MFD 50 VDC LYTIC CAP	R5	470K	70240038	470K—1/4W—5%—CF—T&R
C47	10A50	70320112	10 MFD 50 V T&R	R50	1.5K	70240018	1500—1/4W—5%—CF—T&R
C48	100A25	70320014	100 MFD 25 VDC LYTIC CAP	R51	1.5K	70240018	1500—1/4W—5%—CF—T&R
C49	.047P80	70340016	.047MFD+80-20 50V MON T&R	R52	47K	70240031	47K—1/4W—5%—CF—T&R
C5	.022R400	70320106	.022 MFD 400 V CAP	R53	100W5	70250006	100—5W—10%—WW—AXL
C50	.015	70340010	.015 MFD 10% 50V T/C T&R	R54	68K	70240032	68K—1/4W—5%—CF—T&R
C51	.01CER	70320099	.01MFD 1000VDC CD-UNCUT	R55	47K	70240031	47K—1/4W—5%—CF—T&R
C52	.0015	70340002	.0015 MFD 10% 50V T/C T&R	R56	220K	70240036	220K—1/4W—5%—CF—T&R
C53	.1P10	70340101	.1 MFD 50 VDC 10% MON.T&R	R57	100K	70240034	100K—1/4W—5%—CF—T&R
C54	.1P10	70340101	.1 MFD 50 VDC 10% MON.T&R	R58	400W5FP	70250020	400—5W—10%—FP 67—AXL
C55	10A50	70320112	10 MFD 50 V T&R	R59	10KW1	70210018	10K—1W—5%—MO—T&R
C56	.1P10	70340101	.1 MFD 50 VDC 10% MON.T&R	R6	47K	70240031	47K—1/4W—5%—CF—T&R
C6	.047A400	70320105	.047 MFD 400 V T&R CAP	R60	10KW1	70210018	10K—1W—5%—MO—T&R
C7	470PF	70340058	470PF 10% 50V TUB CER T&R	R61	47FP	70240090	47FP—1/4W—5%—FP—T&R
C8	.1R250MY	70320096	.1 MFD 250 VDC MYLAR CA/B/R	R62	47FP	70240090	47FP—1/4W—5%—FP—T&R
C9	.001	70340000	.001 MFD 10% 50V MON T&R	R63	47K	70240031	47K—1/4W—5%—CF—T&R
CR1	1N757	70400757	1N757A 9.1V 5% ZENER T&R	R64	33K	70240030	33K—1/4W—5%—CF—T&R
CR10	1N4007	70460007	1N4007 1KV.1A SIL. DIODE	R66	15W5	70241097	15—5W—10%—WW—AXL
CR11	1N4003	70464003	1N4003 200V SILICON DIODE	R67	180	70240012	180—1/4W—5%—CF—T&R
CR12	1N4003	70464003	1N4003 200V SILICON DIODE	R7	1M	70240039	1M—1/4W—5%—CF—T&R
CR13	1N4003	70464003	1N4003 200V SILICON DIODE	R70	10K	70240025	10K—1/4W—5%—CF—T&R
CR14	1N4003	70464003	1N4003 200V SILICON DIODE	R71	3W5	70250041	3—5W—10%—WW—AXL
CR2	1N757	70400757	1N757A 9.1V 5% ZENER T&R	R72	3W5	70250041	3—5W—10%—WW—AXL
CR3	1N4148	70464148	1N4148 75V 10MA SILICON DIODE	R73	10K	70240025	10K—1/4W—5%—CF—T&R
CR4	SR2873	70402873	SR-2873 2KV,250MA SIL DIO	R74	10K	70240025	10K—1/4W—5%—CF—T&R
CR5	1N4148	70464148	1N4148 75V 10MA SILICON DIODE	R8	680K	70240065	680K—1/4W—5%—CF—T&R
CR6	SR2873	70402873	SR-2873 2KV,250MA SIL DIO	R9	2.2M	70240040	2.2M—1/4W—5%—CF—T&R
CR7	1N4007	70460007	1N4007 1KV.1A SIL. DIODE	S1	SUZPP	71322251	SUZ P/P SWITCH PC MOUNT
CR8	1N4007	70460007	1N4007 1KV.1A SIL. DIODE	S2	SUZPP	71322251	SUZ P/P SWITCH PC MOUNT
CR9	1N4007	70460007	1N4007 1KV.1A SIL. DIODE	U1	4558	70404558	RC-4558,P DUAL BI-PKG 10
F2	1AFB	70900085	FUSE AGC 1	V1	12AX7	70806612	12 AX7/ECC 83 TUBE
F3	10AFB	70900370	ABC 10 AMP FUSE 250V	V2	12AX7	70806612	12 AX7/ECC 83 TUBE
J1	HIDMNI	71466214	2 TIP HID JACK NINS W/SPD	V3	12AX7	70806612	12 AX7/ECC 83 TUBE
J2	HIDMNI	71466214	2 TIP HID JACK NINS W/SPD	V4	EL84	70806623	EL-84 TUBE
J3	HIDSNI	71466217	STEREO HID JACK NINS W/SP	V5	EL84	70806623	EL-84 TUBE
J4	HIDMNI	71466214	2 TIP HID JACK NINS W/SPD	V6	EL84	70806623	EL-84 TUBE
J5	HIDSNI	71466217	STEREO HID JACK NINS W/SP	V7	EL84	70806623	EL-84 TUBE
K1	12VRELAY	71322277	DPDT RELAY 12V	VR1	POT0339	71190339	250KA 20% MET SPDR 1MM
Q1	J231	70400231	J-231-TO-92-N-CHAN, 40VFET	VR2	1MAMSP5	71190313	1 MEG AUD 5% MET SPIDER
Q2	6534	70406533	MPS-6533/34 TO-92 PNP TRANS	VR3	POT0337	71190337	10KA 20% MET SPDR 1MM
R1	150K	70240035	150K—1/4W—5%—CF—T&R	VR4	POT0336	71190336	10K LIN MET SPIDER 1MM
R10	470K	38 470K	—1/4W—5%—CF—T&R	VR5	1MAMSP5	71190313	1 MEG AUD 5% MET SPIDER
R11	470K	38 470K	—1/4W—5%—CF—T&R	VR6	20KSMS	71190326	20K S TAP MET SPIDER
				VR7	POT0334	71190334	250K LIN METRIC SPDR 1MM